





Horizon - H3





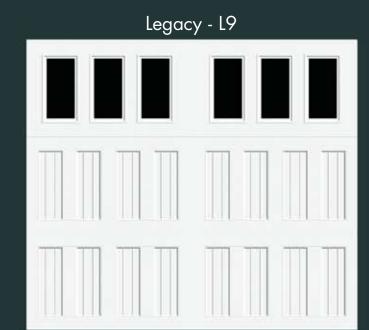

Delano • Fleetwood • Horizon • Legacy

Premium quality, 23 gauge 2-inch thick steel door with horizontal and vertical beaded panels set into 24 and 28 inch section heights. A unique and exclusive design of First United Door Technologies. Patents pending.

Specifications: Sections: Are 2 inches thick in 24 and 28-inch section heights. Each section is manufactured from heavy duty 23-gauge hot dipped galvanized steel. Sections are pre-painted white and rotary embossed with a wood grain texture. Ultra high definition raised panels are pressed in 1/8" height increments to a depth of .375". Tongue and groove-meeting rails are roll formed into the panel incorporating the "RITS" reinforced integral truss system. Vertical stile members are 19-gauge hot dipped galvanized I-beams pre-painted white to match the interior color of the section. Stiles are riveted and bonded to the interior face of the door with an epoxy-based cement. Bottom sections are reinforced with aluminum "L" angle, and bonded to the bottom of the section for supporting a replaceable UV protected bottom weather seal.

<u>H-2 Hardware and Track</u>: Hinges are hot dipped galvanized, 14-gauge wide body end roller hinges and 16-gauge interior hinges. Rollers are 2-inch black nylon, galvanized torsion tube; self-locking fasteners, pre-painted springs, red emergency gripping devices and an inside lock.





Optional Energy Efficient Insulation CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option.

Exclusive RITS[™] Design Exclusive RITS™ "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.

Ten Coat Rust Protection Polyester Top Coat Urethane Primer Coat Sealer Coat Zinc Pre-Treatmen Steel Substrate Galvanized Galvanized Steel Substrate Sealer Coat Zinc Pre-Treatment Urethane Primer Coat olyester Backer Coat Available in: White Only HEAVY-DUT OPTIONAL GLASS LITES rack Radius Ħ




Distributed By:



EXCLUSIVE

RITSTM DESIGN Reinforced Integral Truss





Reinforced Aluminum Bottom Extrusion Heavy duty grooved "U"

type weather seal is set into an aluminum reinforced "L" angle, and bonded to the bottom section.



I-Beam Center Stiles Pre-painted I-beam center stiles are engineered to reinforce the construction of the section and designed to eliminate the use of plastic reinforcement angles when the section is post insulated.

Widths & Heights: Widths: 8', 9', 10', 15', 16', & 18' Heights: 6'0", 6'4", 6'8", 7' & 8' 15' W only available in Delano and Legacy

> Additional widths & heights available upon request.

WARRANTY

First United Door Technologies warrants each garage door and component parts to be free from defects in material and workmanship to the original purchaser. A copy of this warranty is available upon request

sales@firstudt.com





First United Door Technologies

7255 S. Kyrene Rd. Tempe, Az 85283 Ph: 480-705-6632 Fax: 480-705-8497 sales@firstudt.com






SteeLite 0509





THE IMPRESSIONABLE CARRIAGE DOOR

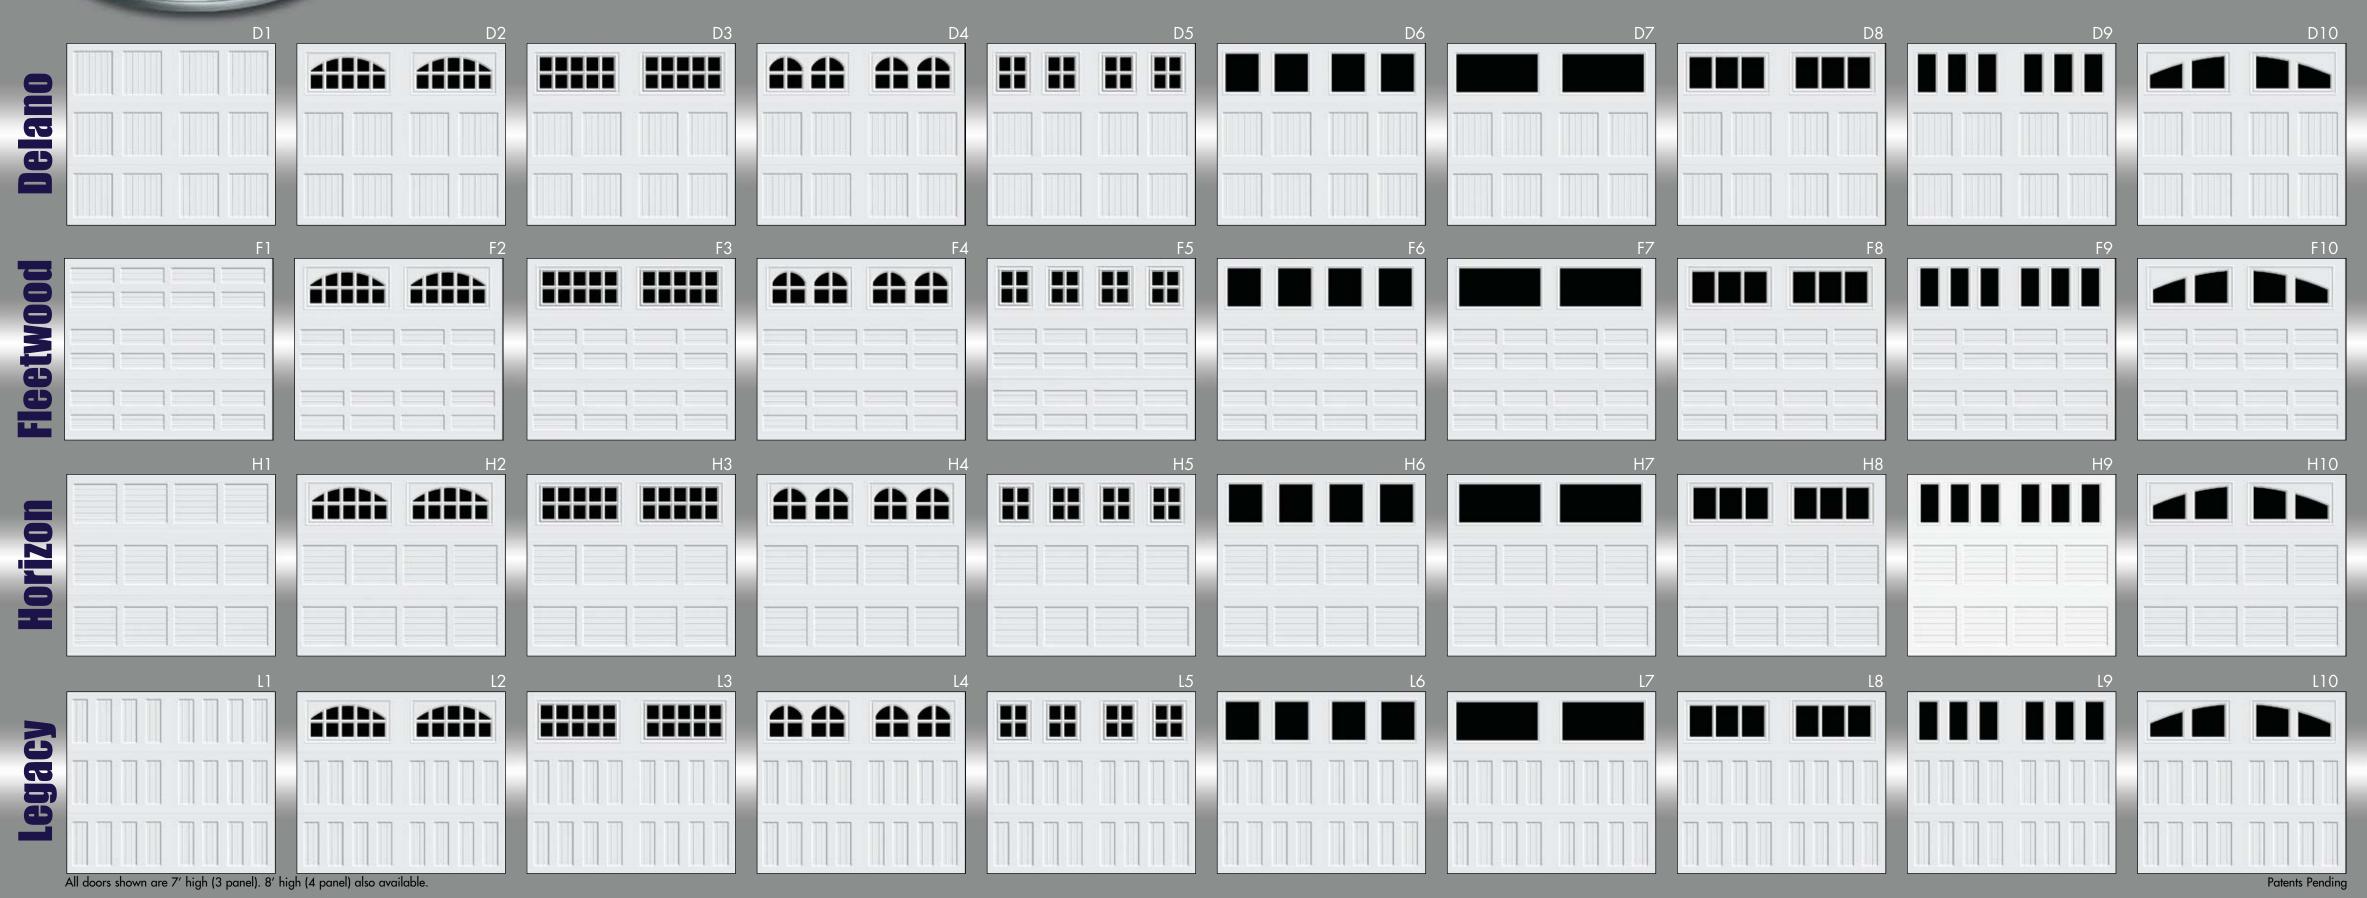

SteeLite[™] is an alternative design for the price conscience consumer who understands a garage door's impact on the curb appeal of their home. Four unique designs are available that are sure to delight the most discriminating homeowner. Optional designer window treatments and decorative hardware are also available. Exterior decorative hardware is not recommended for Fleetwood and Horizon models

